
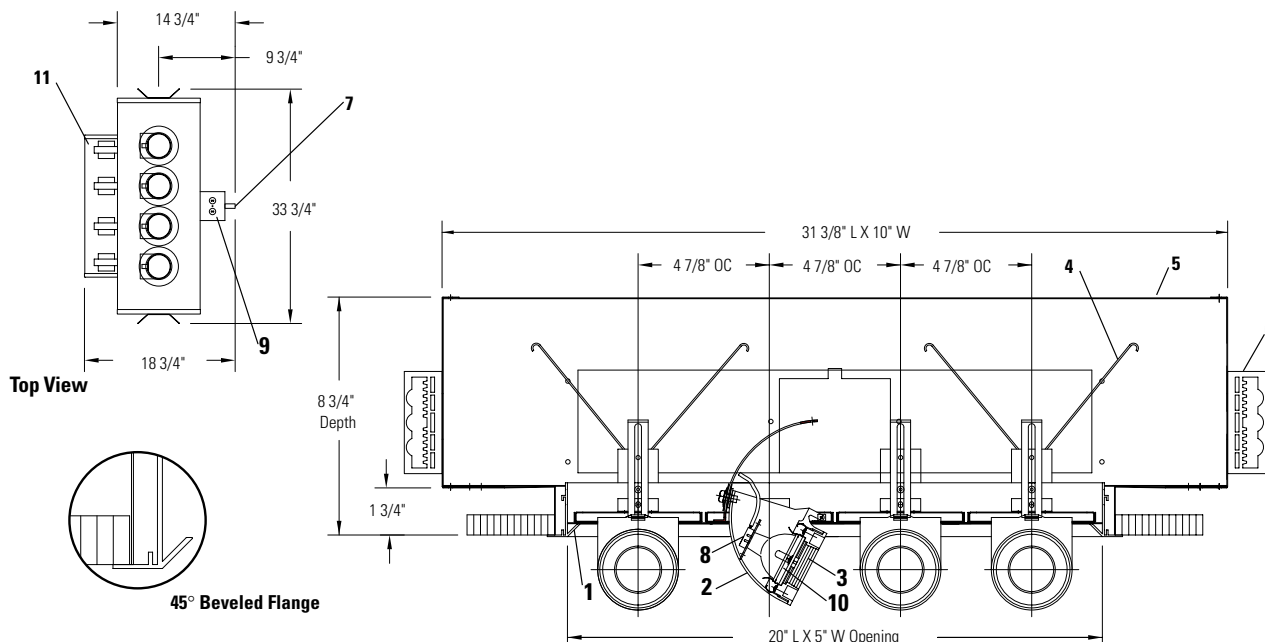




Ceiling Cutout: 12 1/16" L x 6 3/16" W

Add a "1" for 120v or "2" for 277v at the end of the catalog number for voltage

Ordering Information: MR 16 Series E

Cat. No.	Lamp	Ceiling Trim	Aperture Finish
PE4M167EBL	(4) 75W MR 16*	Overlap	White with Black aperture
PE4M167EWL	(4) 75W MR 16*	Overlap	Black with Black aperture

Add a "1" for 120v or "2" for 277v at the end of the catalog number for voltage

*50W Max. when used with accessories.

Features

- 1. Mounting Frame:** Provides clean support for Elbow and overlapping flange installation. Extruded aluminum and aluminum plate, rigidly welded together on all corners. Matte white finish.
- 2. Elbow:** Seamless; diecast aluminum. Allows 358° horizontal and 70° vertical adjustment.
- 3. Stepped Baffle:** Diecast aluminum. Matte black finish for low brightness.
- 4. Tortionite Spring:** For easy installation of mounting frame.
- 5. Housing:** Die formed 22 ga. steel. Finish: Black.
- 6. Mounting Brackets:** Adjustable vertically from outside of housing.
- 7. Thermal Protector:** Meets NEC / UL & CEC / CSA requirements.
- 8. Lampholder:** Steatite for GX/GY 5.3 Bi-Pin MR-16 lamps. 250° C Teflon® leads.
- 9. Junction Box:** 14 ga. steel, 4" x 3-1/2" x 3" box. Allows inspection from below.
- 10. Lamp Guard:** Heat resistant clear glass. May be replaced with solid glass accessory. Lamp manufacturers requirement.
- 11. Transformer Housing:** Die formed steel.

Electrical

Electronic Transformers: Offer reliable operation and are accessible from below for servicing. 12V. Secondary 75 VA. each lamp.

Dimming Controls: Use only dimmers specifically designed for use with electronic transformers. Low Voltage fixtures may produce audible sound when used with dimmers, which may be objectionable in acoustically critical areas.

UL/cUL listed for through branch circuit wiring with maximum of (4) no. 12 AWG, 90°C.

Finish

All painted finishes are powder coated baked enamel.

Options & Accessories

Accessories: Lamp guard may be replaced with 2" dia. series filters and lenses only. The use of accessories reduces the lamp wattage rating to 50W maximum.

Labels

UL/cUL (Suitable for Damp Location), I.B.E.W.

Teflon® is a registered trademark of E.I. DuPont.

Job Information	Type:
Job Name:	
Cat. No.:	
Lamp(s):	
Notes:	


Lightolier a Genlyte Company

631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710

We reserve the right to change details of design, materials and finish.

© 2006 Genlyte Group LLC • C0306





LIGHTOLIER®



Accent Lighting Performance Data

(FC) is initial footcandles at center of beam. Beam length (L) and beam width (W) are to where the candlepower is reduced to 50% of the center beam candlepower. CBCP is center beam candlepower. (C) is distance to the center of the beam.

Lamp data shown is typical, and is based on bare lamp photometrics. Contact lamp manufacturers for availability and performance.



Lamps	Beam Spread (To 50% CBCP)	CBCP	Rated Life (Hrs.)	0° Aiming Angle				30° Aiming Angle				30° Aiming Angle				45° Aiming Angle						
				D	FC	L	W	D	C	FC	L	W	D	C	FC	L	W	D	C	FC	L	W
MR16 LOW VOLTAGE HALOGEN BI-PIN LAMPS																						
 20W MR16 VNSP (EZS)		8200	3000	7'	167	0.9'	0.9'	6'	3.5'	148	1.0'	0.8'	2'	3.5	256	1.0'	0.5'	4'	4.0'	181	1.0	0.7'
				10'	82	1.2'	1.2'	9'	5.2'	66	1.5'	1.3'	3'	5.2'	114	1.5'	0.7'	6'	6.0'	81	1.5	1.0'
				13'	49	1.6'	1.6'	12'	6.9'	37	2.0'	1.7'	4'	6.9'	64	2.0'	1.0'	8'	8.0'	45	2.0	1.4'
				16'	32	2.0'	2.0'	15'	8.7'	24	2.3'	2.1'	5'	8.7'	41	2.5'	1.2'	10'	10.0'	29	2.5	1.7'
 20W MR16 NSP (ESX)		3600	5000	6'	100	1.4'	1.4'	5'	2.9'	94	1.5'	1.3'	2'	3.5'	113	1.9'	0.9'	3'	3.0	141	1.4'	1.0'
				8'	56	1.8'	1.8'	7'	4.0'	48	2.1'	1.8'	3'	5.2'	50	2.8'	1.4'	5'	5.0	51	2.3'	1.6'
				10'	36	2.3'	2.3'	9'	5.2'	29	2.7'	2.4'	4'	6.9'	28	3.8'	1.8'	7'	7.0'	26	3.2'	2.3'
				12'	25	2.7'	2.7'	11'	6.4'	19	3.4'	2.9'	5'	8.7'	18	4.7'	2.3'	9'	9.0'	16	4.2'	2.9'
 20W MR16 FL (BAB)		525	000	2'	131	1.5'	1.5'	2'	1.2'	85	2.0'	1.7'	1'	1.7'	66	4.8'	1.5'	2'	2.0'	46	3.4'	2.1'
				3'	58	2.2'	2.2'	3'	1.7'	38	3.0'	2.5'	2'	3.5'	16	9.7'	2.9'	3'	3.0'	21	5.0'	3.1'
				4'	33	2.9'	2.9'	4'	2.3'	21	4.1'	3.4'	3'	5.2'	7	14.5'	4.4'	4'	4.0'	12	6.7'	4.1'
				5'	21	3.6'	3.6'	5'	2.9'	14	5.1'	4.2'	4'	6.9'	4	19.3'	5.8'	5'	5.0'	7	8.4'	5.1'
 35W MR16 NSP (FRB)		8700	4000	7'	178	1.5'	1.5'	6'	3.5'	157	1.7'	1.5'	2'	3.5'	272	1.7'	0.8'	4'	4.0'	192	1.7'	1.2'
				10'	87	2.1'	2.1'	9'	5.2'	70	2.5'	2.2'	3'	5.2'	121	2.6'	1.3'	6'	6.0'	85	2.6'	1.8'
				13'	51	2.7'	2.7'	12'	6.9'	39	3.4'	2.9'	4'	6.9'	68	3.5'	1.7'	8'	8.0'	48	3.4'	2.4'
				16'	34	3.4'	3.4'	15'	8.7'	25	4.2'	3.6'	5'	8.7'	44	4.3'	2.1'	10'	10.0'	31	4.3'	3.0'
 35W MR16 SP (FRA)		3900	4000	6'	108	2.1'	2.1'	5'	2.9	101	2.4'	2.0'	2'	3.5'	122	3.1'	1.4'	3'	3.0'	153	2.2'	1.5'
				8'	61	2.8'	2.8'	7'	4.0'	52	3.3'	2.9'	3'	5.2'	54	4.7'	2.1'	5'	5.0'	55	3.6'	2.5'
				10'	39	3.5'	3.5'	9'	5.2'	31	4.3'	3.7'	4'	6.9'	30	6.2'	2.8'	7'	7.0'	28	5.1'	3.5'
				12'	27	4.2'	4.2'	11'	6.4'	21	5.2'	4.5'	5'	8.7'	20	7.8'	3.5'	9'	9.0'	17	6.6'	4.5'
 35W MR16 FL (FMW)		1600	000	4'	100	2.9'	2.9'	3'	1.7'	115	3.0'	2.5'	1'	1.7'	200	4.8'	1.5'	3'	3.0'	63	5.0'	3.1'
				6'	44	4.4'	4.4'	5'	2.9'	42	5.1'	4.2'	2'	3.5'	50	9.7'	2.9'	4'	4.0'	35	6.7'	4.1'
				8'	25	5.8'	5.8'	7'	4.0'	21	7.1'	5.8'	3'	5.2'	22	14.5'	4.4'	5'	5.0'	23	8.4'	5.1'
				10'	16	7.3'	7.3'	9'	5.2'	13	9.1'	7.6'	4'	6.9'	13	19.3'	5.8'	6'	6.0'	16	10.1'	6.2'
 37W MR16 IR NSP		11500	4000	6'	180	1.4'	1.4'	7'	4.0'	152	1.6'	1.4'	3'	5.2'	160	2.1'	1.0'	5'	5.0'	163	1.8'	1.2'
				12'	80	2.1'	2.1'	10'	5.8'	75	2.3'	2.0'	4'	6.9'	90	2.9'	1.4'	7'	7.0	83	2.5'	1.7'
				16'	45	2.8'	2.8'	13'	7.5'	44	3.0'	2.8'	5'	8.7'	58	3.6'	1.7'	9'	9.0'	50	3.2'	2.2'
				20'	29	3.5'	3.5'	16'	9.2'	29	3.7'	3.2'	6'	10.4'	40	4.3'	2.1'	11'	11.0'	34	3.9'	2.7'
 37W MR16 IR NFL		3500	4000	6'	97	2.7'	2.7'	5'	2.9'	91	3.0'	2.6'	2'	3.5'	109	4.2'	1.8'	3'	3.0'	137	2.8'	1.9'
				8'	55	3.5'	3.5'	7'	4.0'	46	4.2'	3.6'	3'	5.2'	49	6.2'	2.7'	5'	5.0'	49	4.7'	3.1'
				10'	35	4.4'	4.4'	9'	5.2'	28	5.4'	4.6'	4'	6.9'	27	8.3'	3.5'	7'	7.0'	25	6.5'	4.4'
				12'	24	5.3'	5.3'	11'	6.4'	19	6.6'	5.6'	5'	8.7'	18	10.4'	4.4'	9'	9.0'	15	8.4'	5.6'
 37W MR16 IR FL		2050	4000	4'	128	2.9'	2.9'	3'	1.7'	148	3.0'	2.5'	1'	1.7'	258	4.8'	1.5'	3'	3.0'	61	5.0'	3.1'
				6'	57	4.4'	4.4'	5'	2.9'	53	5.1'	4.2'	2'	3.5'	64	9.7'	2.9'	4'	4.0'	45	6.7'	4.1'
				8'	32	5.8'	5.8'	7'	4.0'	27	7.1'	5.9'	3'	5.2'	28	14.5'	4.4'	5'	5.0'	29	8.4'	5.1'
				10'	21	7.3'	7.3'	9'	5.2'	16	9.1'	7.6'	4'	6.9'	16	19.3'	5.8'	6'	6.0'	20	10.1'	6.2'
 42W MR16 VNSP (EZY)		13100	3500	8'	205	1.3'	1.3'	7'	4.0	174	1.5'	1.3'	3'	5.2'	182	1.9'	0.9'	5'	5.0'	185	1.6'	1.1'
				12'	91	1.9'	1.9'	10'	5.8'	85	2.1'	1.8'	4'	6.9'	102	2.6'	1.3'	7'	7.0	95	2.2'	1.6'
				16'	51	2.5'	2.5'	13'	7.5'	50	2.7'	2.4'	5'	8.7'	66	3.2'	1.6'	9'	9.0'	57	2.8'	2.0'
				20'	33	3.1'	3.1'	16'	9.2'	33	3.4'	2.9'	6'	10.4'	45	3.8'	1.9'	11'	11.0'	38	3.5'	2.4'
 50W MR16 NSP (EXT)		10200	4000	8'	159	2.0'	2.0'	7'	4.0'	135	2.3'	2.0'	3'	5.2'	142	3.1'	1.5'	5'	5.0'	144	2.5'	1.7'
				12'	71	2.9'	2.9'	10'	5.8'	66	3.3'	2.8'	4'	6.9'	80	4.1'	2.0'	7'	7.0'	74	3.5'	2.4'
				16'	40	3.8'	3.9'	13'	7.5'	39	4.3'	3.7'	5'	8.7'	51	5.1'	2.5'	9'	9.0'	45	4.5'	3.1'
				20'	26	4.9'	4.9'	15'	9.2'	28	5.3'	4.5'	6'	10.4'	35	6.2'	2.9'	11'	11.0'	30	5.5'	3.8'
 50W MR16 NFL (EXZ)		3400	000	6'	94	2.9'	2.9'	5'	2.9'	88	3.3'	2.8'	2'	3.5'	106	4.6'	1.9'	3'	3.0'	134	3.1'	2.0'
				8'	53	3.8'	3.8'	7'	4.0'	45	4.6'	3.9'	3'	5.2'	47	7.0'	2.9'	5'	5.0'	48	5.1'	3.4'
				10'	34	4.8'	4.8'	9'	5.2'	27	5.9'	5.0'	4'	6.9'	27	9.3'	3.6'	7'	7.0'	25	7.1'	4.8'
				12'	24	5.8'	5.8'	11'	6.4'	18	7.2'	6.1'	5'	8.7'	17	11.6'	4.8'	9'	9.0'	15	9.2'	6.1'
 50W MR16 FL (EXN)		1850	000	4'	116	2.9'	2.9'	3'	1.7'	134	3.0'	2.5'	1'	1.7'	231	4.8'	1.5'	3'	3.0'	73	5.0'	3.1'
				6'	51	4.4'	4.4'	5'	2.9	48	5.1'	4.2'	2'	3.5'	58	9.7'	2.9'	4'	4.0'	41	6.7'	4.1'
				8'	29	5.8'	5.8'	7'	4.0'	25	7.1'	5.9'	3'	5.2'	26	14.5'	4.4'	5'	5.0'	26	8.4'	5.1'
				10'	19	7.3'	7.3'	9'	5.2'	15	9.1'	7.6'	4'	6.9'	14	19.3'	5.8'	6'	6.0'	18	10.1'	6.2'
 50W MR16 WFL (FNV)		1150	000	3'	128	3.1'	3.1'	3'	1.7'	83	4.6'	3.6'	1'	1.7'	144	22.3'	2.1'	2'	2.0'	102	5.7'	2.9'
				5'	46	5.2'	5.2'	5'	2.9'	30	7.6'	6.0'	2'	3.5'	36	44.5'	4.2'	3'	3.0'	45	8.6'	4.4'
				7'	23	7.3'	7.3'	7'	4.0'	15	10.7'	8.4'	3'	5.2'	16	66.8'	6.2'	4'	4.0'	25	11.4'	5.9'
				9'	14	9.4'	9.4'	9'	5.2'	9	13.7'	10.8'	4'	6.9'	9	89.1'	8.3'	5'	5.0'	16	14.3'	7.4'
 73W MR16 SP		14000	4000	8'	219	1.4'	1.4'	7'	4.0'	186	1.6'	1.4'	3'	5.2'	194	2.1'	1.0'	5'	5.0'	198	1.8'	1.2'
				12'	97	2.1'	2.1'	10'	5.8'	91	2.3'	2.0'	4'	8.9'	109	2.9'	1.4'	7'	7.0'	101	2.5'	1.7'
				16'	55	2.8'	2.9'	13'	7.5'	54	3.0'	2.6'	5'	8.7'	70	3.6'	1.7'	9'	9.0'	61	3.2'	2.5'
				20'	35	3.5'	3.5'	16'	8.2'	36	3.7'	3.2'	6'	10.4'	49	4.3'	2.1'	11'	11.0'	41	3.8'	2.7'
 73W MR16 FL		2500	4000	4'	156	2.5'	2.6'	3'	1.7'	180	2.7'	2.3'	1'	1.7'	313	3.8'	1.3'	3'	3.0'	98	4.4'	2.8'
				6'	59	3.8'	3.8'	5'	2.9'	65	4.5'	3.8'	2'	3.5'	78	7.5'	2.6'	4'	4.0'	55	5.8'	3.7'
				8'	39	5.2'	5.2'	7'	4.0'	33	6.3'	5.3'	3'	5.2'	35	11.4'	3.9'	5'	5.0'	35	7.3'	4.6'
				10'	25	6.5'	6.5'	9'	5.2'	20	6.1'	6.6'	4'	6.9'	20	15.2'	5.2'	6'	6.0'	25	6.7'	5.4'